

TR93IBL2


Cooker size N. of cavities with energy label Cavity heat source Hob type Type of main oven Type of second oven Cleaning system main oven EAN code Energy efficiency class Energy efficiency class, second cavity 90x60 cm 2 ELECTRICITY Induction Thermo-ventilated Thermo-ventilated Vapor Clean 8017709312374 A B



Aesthetics

Aesthetic	Victoria	Display	electronic 5 buttons
Colour	Black	Colour of buttons	Black
Finishing	Glossy	No. of controls	9
Design	Victoria	Serigraphy colour	Silver
Door	With frame	Handle	Smeg Victoria
Upstand	Yes	Handle Colour	Brushed stainless steel
Hob colour	Black enamel	Glass type	Black
Command panel finish	Enamelled metal	Plinth	Anthracite
Control knobs	Smeg Victoria	Logo	assembled 50's
Controls colour	Stainless steel	Logo position	Upstand+ Command panel

Programme / Functions

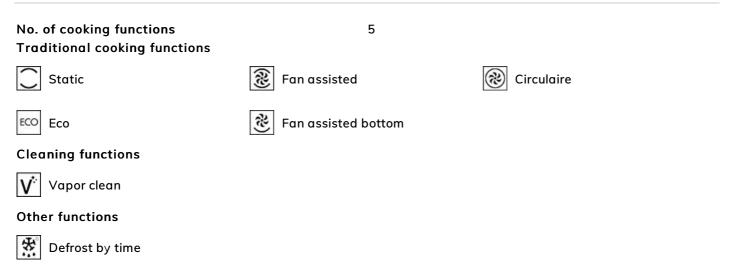



Programs / Functions Auxiliary Oven

Cooking functions cavity 2

1

Traditional cooking functions, cavity 2



Programs / Functions Third Oven

No. of functions third oven **Oven light**

Full grill

Hob	tech	nnical	features

	OP
00	Ŧ

Total no. of cook zones 5

Front left - Induction - single - 2.30 kW - Booster 3.00 kW - - Ø 21.0 cm Rear left - Induction - single - 1.40 kW - - Ø 18.0 cm Central - Induction - single - 2.30 kW - Booster 3.00 kW - - Ø 27.0 cm Rear right - Induction - single - 1.40 kW - - Ø 18.0 cm Front right - Induction - single - 2.30 kW - Booster 3.00 kW - - Ø 21.0 cm

Automatic switch off when overheat	Yes	Minimum pan diameter indication	Yes
Automatic pan detection	Yes	Selected zone indicator	Yes

Main Oven Technical Features

💶 🚊 🔗 🚊			
No. of lights	1	Removable inner door	Yes
Fan number	1	Total no. of door glasses	3
Net volume of the cavity	61 I	No.of thermo-reflective	1
Gross volume, 1st cavity	701	door glasses	
Cavity material	Ever Clean enamel	Safety Thermostat	Yes
No. of shelves	4	Usable cavity space	316x460x412 mm
Type of shelves	Metal racks	dimensions (HxWxD)	
.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		Temperature control	Electro-mechanical
Light type	Halogen	Lower heating element	1200 W
Light Power	40 W	power	
Cooking time setting	Start and Stop	Upper heating element -	1000 W
Door opening	Side opening	Power	
Side opening door	Yes	Grill elememt	1700 W
Removable door	Yes	Large grill - Power	2700 W



 Full glass inner door
 Yes
 Circular heating element
 2000 W

 - Power
 Grill type
 Electric

 Tilting grill
 Yes

Options Main Oven

Timer	Yes	Minimum Temperature	50 °C
End of cooking acoustic alarm	Yes	Maximum temperature	245 °C

Second Oven Technical Features

62IK 🖳 📮 ኞ 📮			
Fan number	1	Removable door	Yes
Net volume of the	62 I	Full glass inner door	Yes
second cavity		Removable inner door	Yes
Gross volume, 2nd	69 I	No. total door glasses	1
cavity		No. thermo-reflective	1
Cavity material	Ever Clean enamel	door glasses	
No. of shelves	9	Safety Thermostat	Yes
Type of shelves	Metal racks	Cooling system	Tangential
No. of lights	1	Usable cavity space	605x275x370 mm
Light type	Halogen	dimensions (HxWxD)	
Light Power	40 W	Temperature control	Electro-mechanical
Door opening	Side opening	Circular heating element	2500 W
Side opening door	Yes	- Power	

Options Auxiliary Oven

Minimum Temperature 50 °C

Maximum temperature 245 °C

Third Oven Technical Features

<u>.</u>			
Net volume, 3rd cavity	36	Removable inner door	Yes
Gross volume, 3rd	41	No. total door glasses	3
cavity		No. of thermo-reflective	1
Cavity material	Ever Clean enamel	door glasses	
No. of shelves	2	Safety Thermostat	Yes
Type of shelves	Metal racks	Cooling system	Tangential
No. of lights	1	Usable cavity space	169x440x443 mm
Light type	Halogen	dimensions (HxWxD)	
Light Power	40 W	Temperature control	Electro-mechanical
Door opening	Flap down	Large grill - Power	2700 W
Removable door	Yes	Grill type	Electric
Full glass inner door	Yes	Tilting grill	Yes



Options Third Oven

Minimum Temperature	50 °C	Maximum temperature	260 °C	

Accessories included for Main Oven & Hob

Rack with back and side	2	Grill mesh	1
stop		Telescopic Guide rails,	1
40mm deep tray	1	partial Extraction	

Accessories included for Secondary Oven

Oven grid with back	4	Plate rack/warmer	1
stop			
5100			

Accessories included for Third Oven


1

40mm deep tray

Electrical Connection

Electrical connection	15000 W	Power supply cable	150 cm
rating		length	
Current	42 A	Additional connection	Yes, Double and Three
Voltage	220-240 V	modalities	Phase
Voltage 2 (V)	380-415 V	Frequency	50 Hz
Type of electric cable installed	Yes, Single phase	Terminal block	5 poles



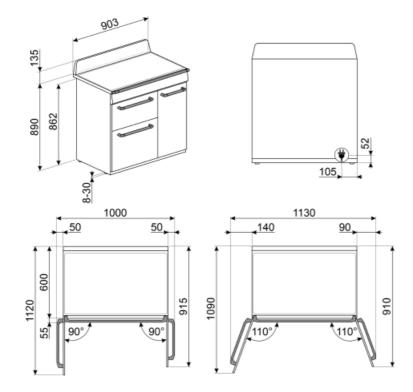



Not included accessories

KIT600TR93



Cover strip for hob back side, suitable for TR93 Victoria cookers

KITP65TR93

Depth extension kit (650 mm), nero, suitable for TR93 cookers



GTP

Partially extractable telescopic guides (1 level), suitable for traditional ovens. Made in stainless steel, they guarantee stability and facilitate the smooth extraction of the trays.



BNP608T

Teflon-coated tray, 8mm depth, to be placed on the grid



KIT1TR9N

Splashback black, 90cm .suitable for TR90 and TR93 Victoria cookers



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

BBQ



Double sided plate BBQ. Suitable for recreating succulent and crispy dishes in the oven with the typical taste of grilled cooking. The ribbed side is particularly suitable for meats and cheeses. The smooth side for fish, seafood and vegetables.



Pizza shovel with folding handle. Dimensions L31.5 x H32.5 cm. Easy and convenient to use and store. Perfect for serving pizza, bread and savory pastries in a safe and professional way.

AIRFRY

Air fryer rack AIRFRY . Ideal for recreating traditional frying in the oven, but with fewer calories and less fat. It allows you to cook quickly and simply dishes such as French fries, fried vegetables and fish, ensuring perfect browning and crispiness.

SFLK1



Child lock

PRTX

Refractary pizza stone with handles. D=35cm Not suitable for microwave ovens. Suitable for gas ovens, to be put on the griddle.

GRILLPLATE




Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

BN620-1

Enamelled tray suitable for 45cm and 60cm ovens. Depth 20 mm. Perfect for a wide range of savoury and sweet baking.

KITH93



TPKPLATE



Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.

GTT

Totally extractable telescopic guides (1 level), suitable for traditional ovens. Made in stainless steel, they guarantee stability and facilitate the smooth extraction of the trays.







BN640

Enamelled tray suitable for 45cm and 60cm ovens. Depth 540 mm. Perfect for cooking and roasting meat and fish in sauces. Also ideal for experimenting with lighter and crunchy side dishes




SMOLD

Set of 7 silicone moulds for ice creams, ice lollies, pralines, ice cubes or to portion food. Usable from -60°C to +230°C



Symbols glossary (TT)

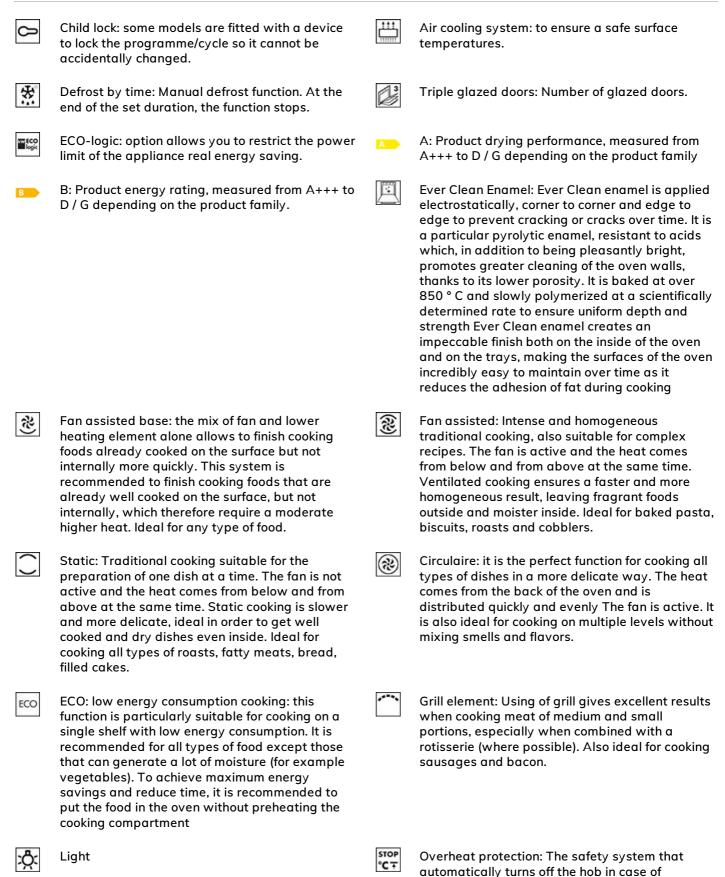

overheating of the control unit.



	Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.	旦	All glass inner door: All glass inner door, a single flat surface which is simple to keep clean.
J	The inner door glass: can be removed with a few quick movements for cleaning.	0	Side lights: Two opposing side lights increase visibility inside the oven.
	Plate rack warming: function for heating or keeping dishes warm. Place the baking tray on the lowest shelf and stack the dishes to be heated.	<u>,2</u>	The oven cavity has 2 different cooking levels.
.4	The oven cavity has 4 different cooking levels.	.9	The oven cavity has 9 different cooking levels.
	Telescopic rails: allow you to pull out the dish and check it without having to remove it from the oven entirely.	ŝ	Electronic control: Allows you to maintain temperature inside the oven with the precision 2- 3 ° C. This enables to cook meals that are very sensitive to temperature changes, such as cakes, souffles, puddings.
Ċ	Tilting grill: the tilting grill can be easily unhooked to move the heating element and clean the roof of the appliance in one simple step.	V	Vapor Clean: a simple cleaning function using steam to loosen deposits in the oven cavity.
36 It	The capacity indicates the amount of usable space in the oven cavity in litres.	61 lt	The capacity indicates the amount of usable space in the oven cavity in litres.
62 It	The capacity indicates the amount of usable space in the oven cavity in litres.		